SAMSUNG SECRET

SAMSUNG
ELECTRONICS

Product Information

Customer : Hisense   ISSUED DATE : Sep. 2, 2010

SAMSUNG TFT-LCD

MODEL : LTA320AP05-107

The Information Described in this Specification is Preliminary and can be changed without prior notice

LCD Business

Samsung Electronics Co . , LTD.

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	1 / 29

SAMSUNG SECRET

Contents

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	2 / 29

SAMSUNG SECRET

Revision History

Date	Rev. No	Page	Summary
Sep. 2. 2010	000	all	First issued

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	3 / 29

General Description

Description

LTA320AP05-107 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT (Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit.

The resolution of a 32.0" is 1366 x 768 and this model can display up to 16.7 Million colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

Features

- RoHS compliance (Pb-free)
- High contrast & aperture ratio
- PVA (Patterned Vertical Align) mode
- Wide viewing angle (± 178°)
- High speed response
- HD resolution (16:9)
- Direct U-Type 4 CCFLs (Cold Cathode Fluorescent Lamp)
- DE (Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface (1pixel/clock)

General Information

Items	Specification	Unit	Note
Module Size	760.0(H_{TYP}) x 450.0(V_{TYP})	mm	± 1.0mm
	50.5 (D_{MAX})		With inverter
Weight	5,700 Max	g	
Pixel Pitch	0.51075(H) x 0.51075(V)	mm	
Active Display Area	697.68(H) x 392.25(V)	mm	
Surface Treatment	Haze 7, Hard-coating(3H)	-	
Display Colors	8 bit - 16.7M	colors	
Number of Pixels	1366 x 768	pixel	
Pixel Arrangement	RGB Vertical stripe	-	
Display Mode	Normally Black	-	
Luminance of White	450 Typ.	cd/m^2	

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	4 / 29

SAMSUNG SECRET

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item		Symbol	Min.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	GND-0.5	13.2	V	(1)
Storage temperature		T_{STG}	-20	60	℃	(2)
Glass surface temperature (Operation)	Center	T_{OPR}	0	50	℃	(2),(5)
	T. Uniformity	$\triangle T$	-	10	℃	
Shock (non - operating)		S_{nop}	-	50	G	(3)
Vibration (non - operating)		V_{nop}	-	1.5	G	(4)

Note (1) Ta= 25 ± 2 ℃

    (2) Temperature and relative humidity range are shown in the figure below.
       a. 90 % RH Max. (Ta ≤ 39 ℃)
       b. Relative Humidity is 90% or less. (Ta > 39 ℃)
       c. No condensation
    (3) 11ms, sine wave, one time for ± X, ± Y, ± Z axis
    (4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis
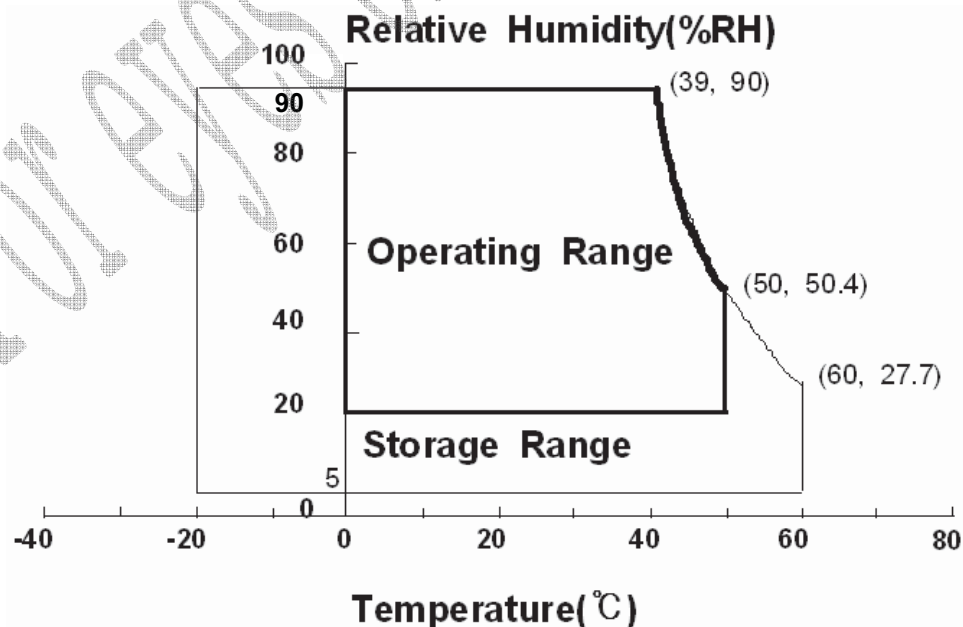
Fig. Temperature and Relative humidity range

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	5 / 29

(5) Definition of test point

5mm

5mm

LCD Module (Active)
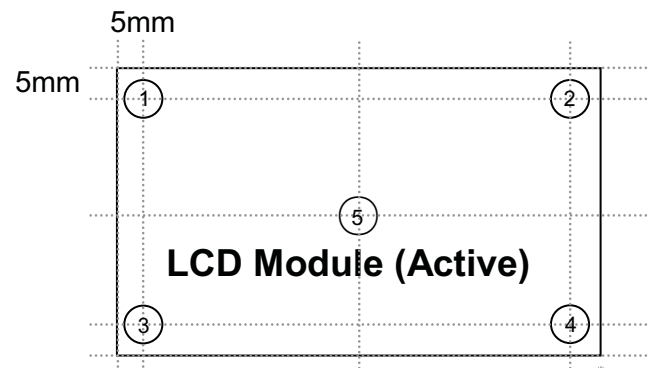
$\triangle T$ should be less than $10\,°C$ ($\triangle T = |\,T_{OPR} - T_{MAX}\,|$)

T_{OPR} : Temperature of the center of the glass surface (Test point 5)
T1~ T4 : Temperature of each edge of the glass surface
T_{MAX} : The highest temperature of the glass surface

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	6 / 29

2. Optical Characteristics

SAMSUNG SECRET

The optical characteristics should be measured in a dark room or equivalent.
Measuring equipment : TOPCON RD-80S,TOPCON SR-3, ELDIM EZ-Contrast

(Ta = 25 ± 2℃, VDD=12V, fv= 60Hz, f_{DCLK}=75MHz,Lamp current = 12.5 mA)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R		3000	4,000	-		(1) SR-3
Response Time	G-to-G (Avg)	Tg		-	20	30		(3) RD-80S
Luminance of White (Center of screen)		Y_L		400	450	-	cd/m²	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx	Normal θL,R=0 θU,D=0	TYP. -0.03	0.637	TYP. +0.03		(5),(6) SR-3
		Ry			0.326			
	Green	Gx			0.287			
		Gy	Viewing Angle		0.610			
	Blue	Bx			0.149			
		By			0.058			
	White	Wx			0.280			
		Wy			0.290			
Color Gamut		-		-	72	-	%	(5) SR-3
Color Temperature		-		-	10,000	-	K	(5) SR-3
Viewing Angle	Hor.	θL	C/R≥10	79	89	-	Degree	(6) EZ-Contrast
		θR		79	89	-		
	Ver.	θU		79	89	-		
		θD		79	89	-		
Brightness Uniformity (9 Points)		B_{uni}		-	-	25	%	(2) SR-3

- Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between
40min and 60min after lighting the back light at the given temperature for stabilization
of the back light. This should be measured in the center of screen.

Environment condition : Ta = 25 ± 2 ℃

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	7 / 29

SAMSUNG SECRET

Photo detector	Field
SR-3	1°
RD-80S	2°

Photo detector

Field

SR-3 : 50㎝
RD-80S : 50㎝
EZ-Contrast :0㎝

TFT - LCD Module

LCD Panel

The center of the screen

- Definition of test point

Active Area

◯ Test Point

	228	683	1138
128	⑨	⑧	⑦
384	⑥	⑤	④
640	③	②	①
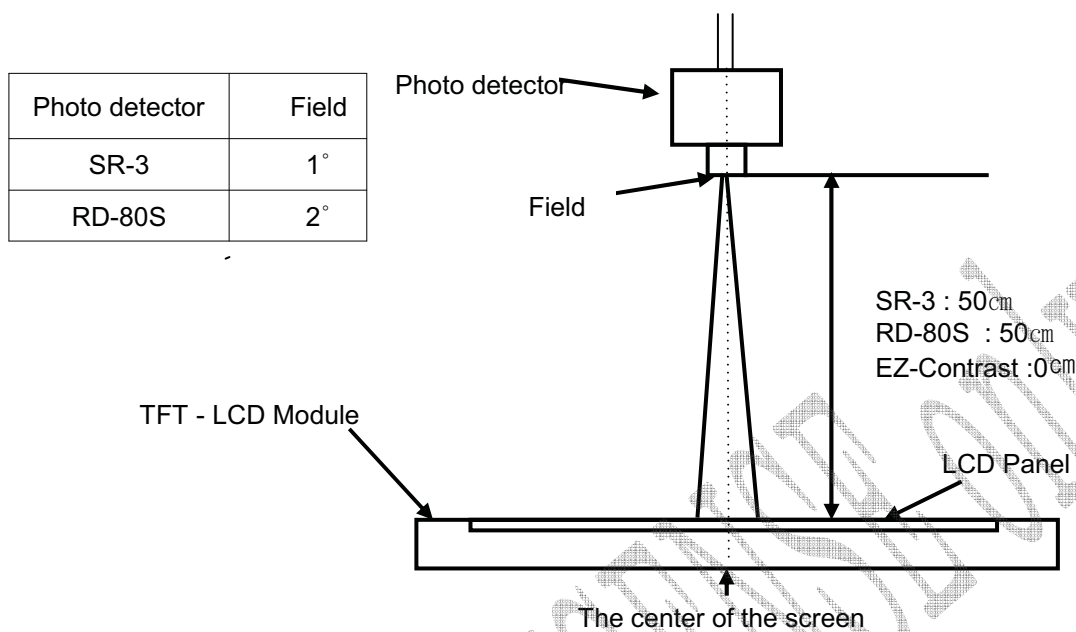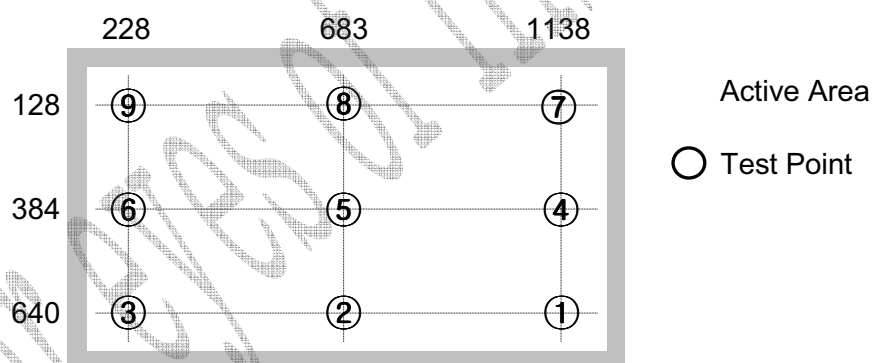
Note (1) Definition of Contrast Ratio (C/R)
: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G\max}{G\min}$$

Gmax : Luminance with all pixels white
Gmin : Luminance with all pixels black

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	8 / 29

Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$Buni = 100 * \frac{(B\max - B\min)}{B\max}$$

Bmax : Maximum brightness
Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

Display data	Black (data off)	White (data on)	Black (data off)

Optical Instruments
Response

100%
90%

10%
0%

T_R T_F
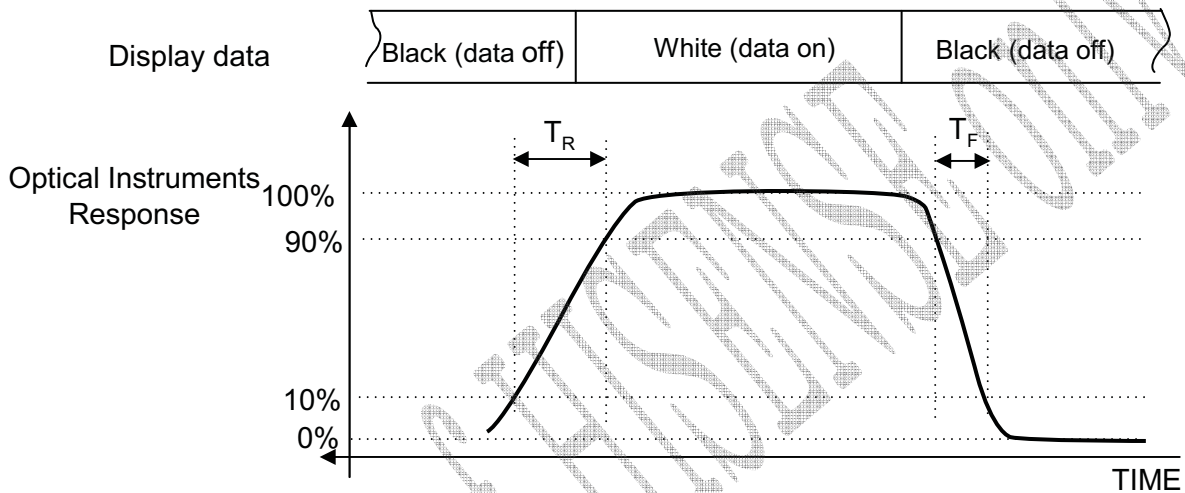
TIME

※ G- to- G : Average response time between Gray to gray (scale)

Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)
Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle
: Viewing angle range (C/R ≥10)

θ_U
θ_R
θ_L
θ_D
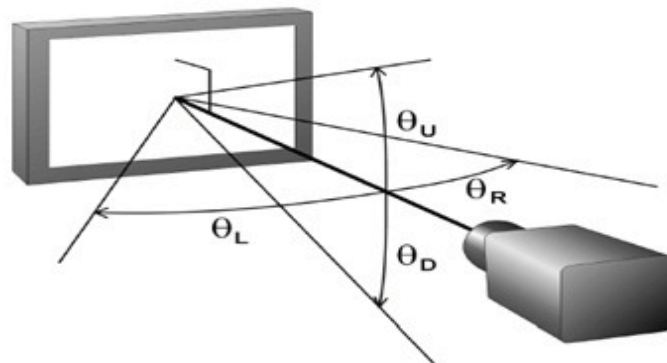
MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	9 / 29

SAMSUNG SECRET

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

Ta = 25℃ ± 2 ℃

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I_{DD}	-	400	500	mA	(2),(3)
	(b) White		-	500	600	mA	
	(c) V-Stripe		-	600	700	mA	
Vsync Frequency		f_V	50	60	66	Hz	
Hsync Frequency		f_H	44	48	53	kHz	
Main Frequency		f_{DCLK}	72	78	85	MHz	
Rush Current		I_{RUSH}	-	-	4	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD}.
　　　(2) fv=60Hz, f_{DCLK} = 75MHz, V_{DD} = 12.0V, DC Current.
　　　(3) Power dissipation check pattern (LCD Module only)

　　　a) Black Pattern　　　b) White Pattern　　　c) V strip
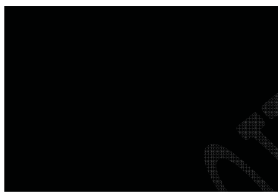
　　　(4) Measurement Conditions

T_{RUSH}=470μs
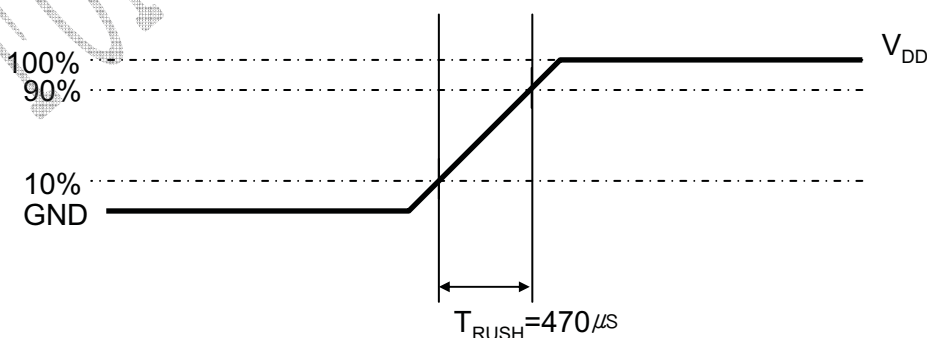
Rush Current I_{RUSH} can be measured when T_{RUSH}. is 470μs.

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	10 / 29

3.2　Back Light Unit

The back light unit contains 4 direct-lighting U-type CCFLs (Cold Cathode Fluorescent Lamp). The characteristics of lamps are shown in the following tables.

Ta=25 ± 2℃
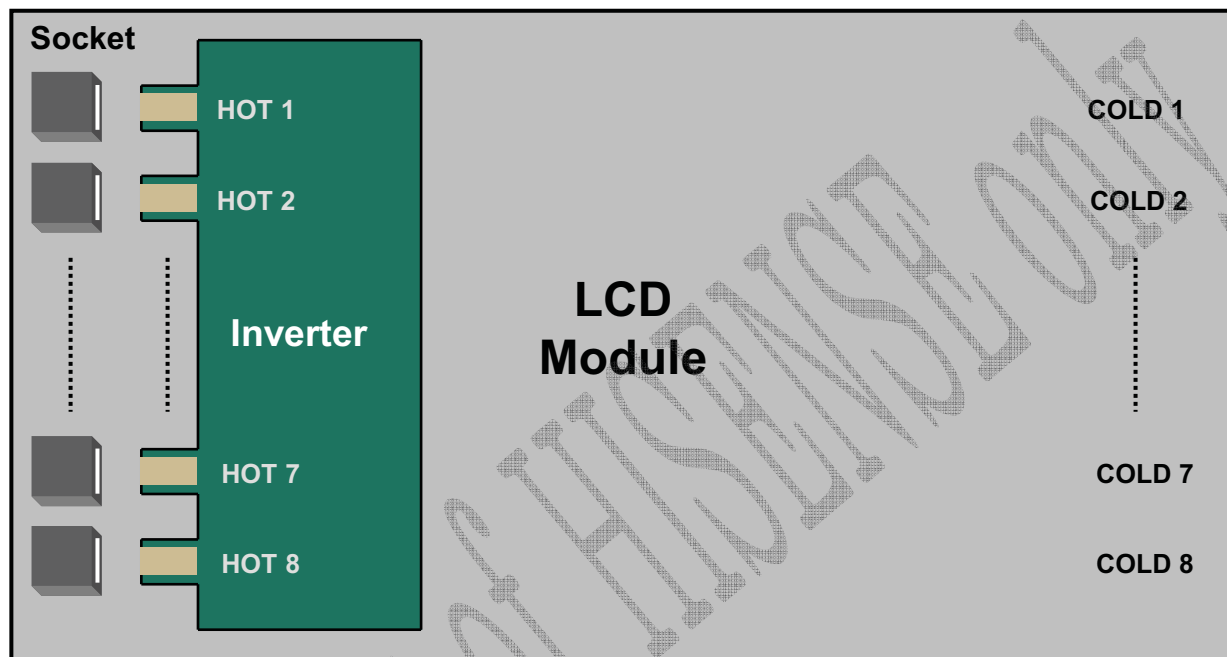
Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	50,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : Ta = 25± 2℃, I_L = 5.0 mArms(Min),13.5 mArms (Max)

For single lamp only.]

(2) LIPS HOT part

(3) The lamp starting voltage Vs should be applied to the lamp for more than 1second

under starting up duration. Otherwise the lamp could not be lighted on completed.

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	11 / 29

SAMSUNG SECRET

3.3 Inverter Input Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	Vin	-	22	24	26	V	Ta=25± 2 ℃
Input Current	I_{RUSH}	Vin = 24V Vdim = 3.3V	-	-	(3.75)	A	(1)
			-	-	3.3		(2)
Lamp Current	I_O	Vin = 24V Vdim = 3.3V	5.0	9.0	13.0	mArms	(2)
Frequency	F_{LAMP}	Vin = 24V	30.0	45.0	60.0	kHz	-
Backlight On/Off	ON	Vin = 24V	2.4	-	5.25	V	(3)
	OFF	Vin = 24V	0	-	0.8		
Dimming Control	V_{DIM}	Max Lum	3.3	-	-	V	(4)
		Min. Lum	-	-	0		

Note) Power Consumption is measured when 450[cd/m²] of luminance which is the typical luminance.
　　　Lamp Current is measured at the point before Lamp.

(1) Max Value of the Power Consumption is measured during initial turn-on time* of the backlight.

(2) Max Value of the Power Consumption is measured after 120 min warm-up.

(3) Inverter pin NO.12 is for backlight On/Off.

(4) Inverter pin NO.13 is for dimming control.

　* Initial turn-on time : From 0sec to 60min after turn-on

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	12 / 29

4. Input Terminal Pin Assignment

SAMSUNG SECRET

4.1. Input Signal & Power

Connector :IS100-L30O-C23

PIN No.	Description	PIN No.	Description
1	No Connection (Note1)	16	GND
2	No Connection (Note1)	17	RxIN3-
3	No Connection (Note1)	18	RxIN3+
4	GND	19	GND
5	RxIN0-	20	No Connection (Note1)
6	RxIN0+	21	LVDS OPTION (Note 2)
7	GND	22	No Connection (Note1)
8	RxIN1-	23	GND
9	RxIN1+	24	GND
10	GND	25	GND
11	RxIN2-	26	Vin
12	RxIN2+	27	Vin
13	GND	28	Vin
14	RxCLK-	29	Vin
15	RxCLK+	30	Vin

Note1) No Connection: **This PINS are only used ONLY for SAMSUNG.**
Note2) LVDS OPTION : If this PIN is HIGH (3.3 V) → Normal LVDS format
　　　　　　　　　　　　　　　　　 LOW (GND) →   JEIDA LVDS format

SEQUENCE　　: On = V$_{DD}$(T1) ≥ LVDS Option ≥ Interface Signal(T2)
OFF = Interface Signal(T3) ≥ LVDS Option ≥ V$_{DD}$

| MODEL | LTA320AP05-107 | Doc. No | 06-000-G-100902 | Page | 13 / 29 |

Note(1) Pin number starts from Left side

PCB

Pin No. 1   Pin No. 30

#1   #30

#1   #30
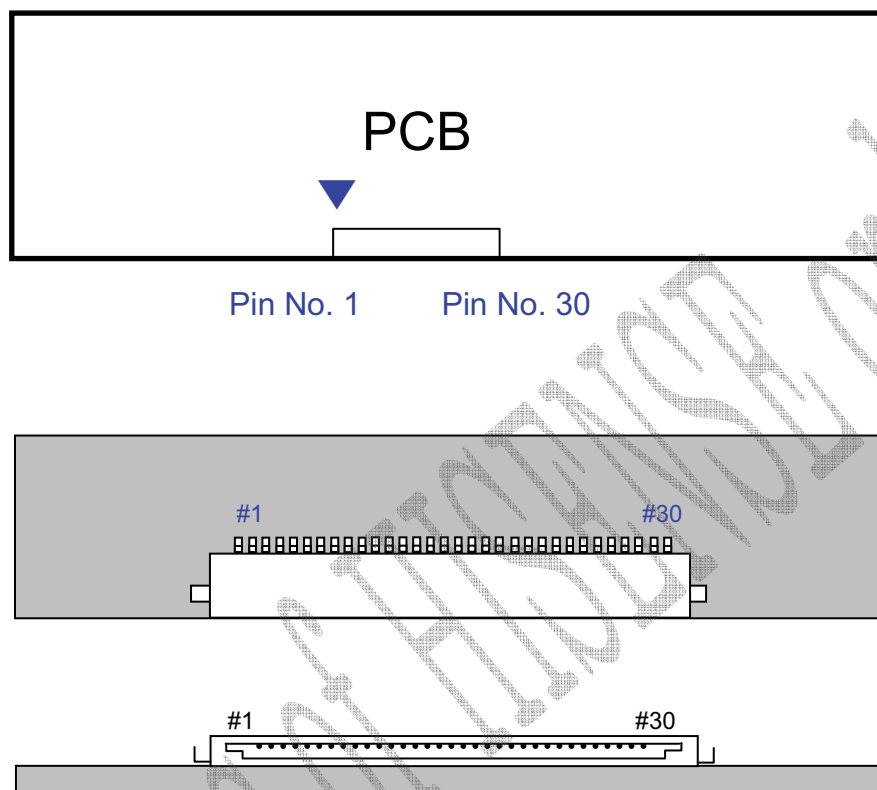
Fig. Connector diagram

a. Power GND pins should be connected to the LCD's metal chassis.
b. All power input pins should be connected together.
c. All NC pin should be separated from other signal or power.

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	14 / 29

SAMSUNG SECRET

4.2 Inverter Input Pin Configuration

Connector : JST, S14B-PHA-SM-TB(LF)

Pin No.	Pin Configuration (FUNCTION)
1	Vin (24 V)
2	Vin (24 V)
3	Vin (24 V)
4	Vin (24 V)
5	Vin (24 V)
6	GND
7	GND
8	GND
9	GND
10	GND
11	No Connection (DO NOT CONNECT)
12	Backlight On /Off [ON: 2.4 ~ 5.5 V, OFF: 0 ~ 0.8 V]
13	Dimming Control [0V: Min, 3.3V: Max]
14	No Connection (DO NOT CONNECT)

4.3. Inverter Input Power Sequence
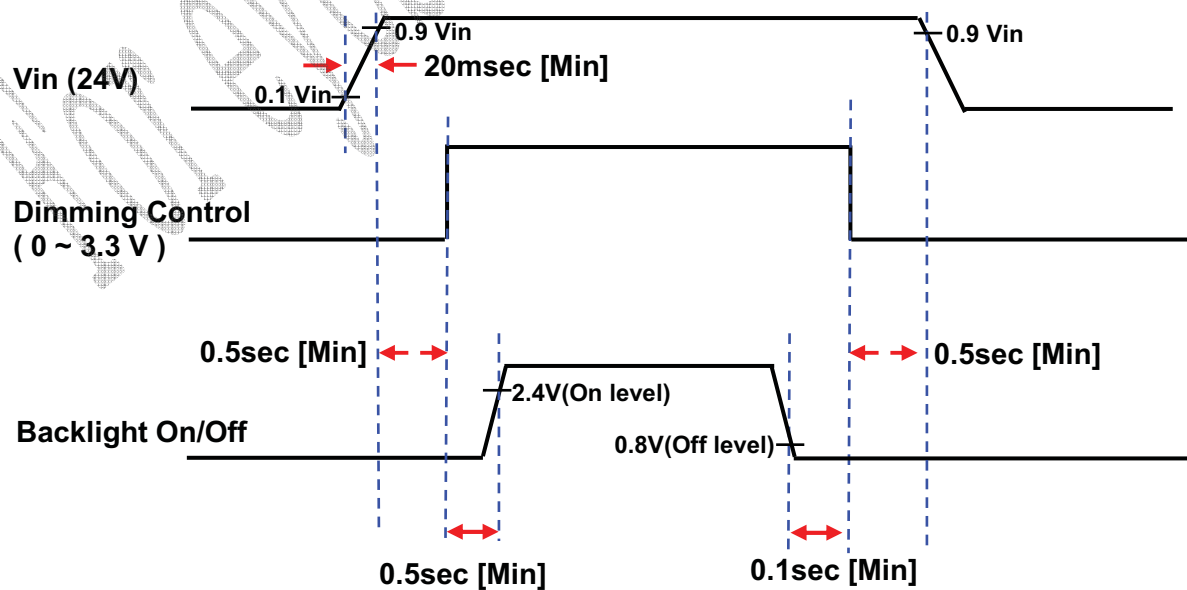
MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	15 / 29

SAMSUNG SECRET

4.4 LVDS Interface
  - LVDS Receiver : Tcon (merged)
  - Data Format (JEIDA & VESA)

	LVDS pin	JEIDA -DATA	VESA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2	R0
	TxIN/RxOUT1	R3	R1
	TxIN/RxOUT2	R4	R2
	TxIN/RxOUT3	R5	R3
	TxIN/RxOUT4	R6	R4
	TxIN/RxOUT6	R7	R5
	TxIN/RxOUT7	G2	G0
TxOUT/RxIN1	TxIN/RxOUT8	G3	G1
	TxIN/RxOUT9	G4	G2
	TxIN/RxOUT12	G5	G3
	TxIN/RxOUT13	G6	G4
	TxIN/RxOUT14	G7	G5
	TxIN/RxOUT15	B2	B0
	TxIN/RxOUT18	B3	B1
TxOUT/RxIN2	TxIN/RxOUT19	B4	B2
	TxIN/RxOUT20	B5	B3
	TxIN/RxOUT21	B6	B4
	TxIN/RxOUT22	B7	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R0	R6
	TxIN/RxOUT5	R1	R7
	TxIN/RxOUT10	G0	G6
	TxIN/RxOUT11	G1	G7
	TxIN/RxOUT16	B0	B6
	TxIN/RxOUT17	B1	B7
	TxIN/RxOUT23	RESERVED	RESERVED

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	16 / 29

SAMSUNG SECRET

4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																							GRAY SCALE LEVEL
		RED								GREEN								BLUE								
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7	
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R252
	↓ LIGHT	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G252
	↓ LIGHT	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G253
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G254
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G255
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B252
	↓ LIGHT	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	B253
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B254
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B255

Note) Definition of Gray :
Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)
Input Signal : 0 = Low level voltage, 1 = High level voltage

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	17 / 29

SAMSUNG SECRET

5. Interface Timing

5.1 Timing Parameters （DE only mode）

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	72	78	85	MHz	-
Hsync		F_H	44	48	53	KHz	-
Vsync		F_V	50	60	66	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	768	-	lines	-
	Vertical Total	T_V	780	802	1200	lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1366	-	clocks	-
	Horizontal Total	T_H	1460	1624	2000	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does
      not have an effect on normal operation.
     (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
     (2) Internal V_{DD} = 3.3V

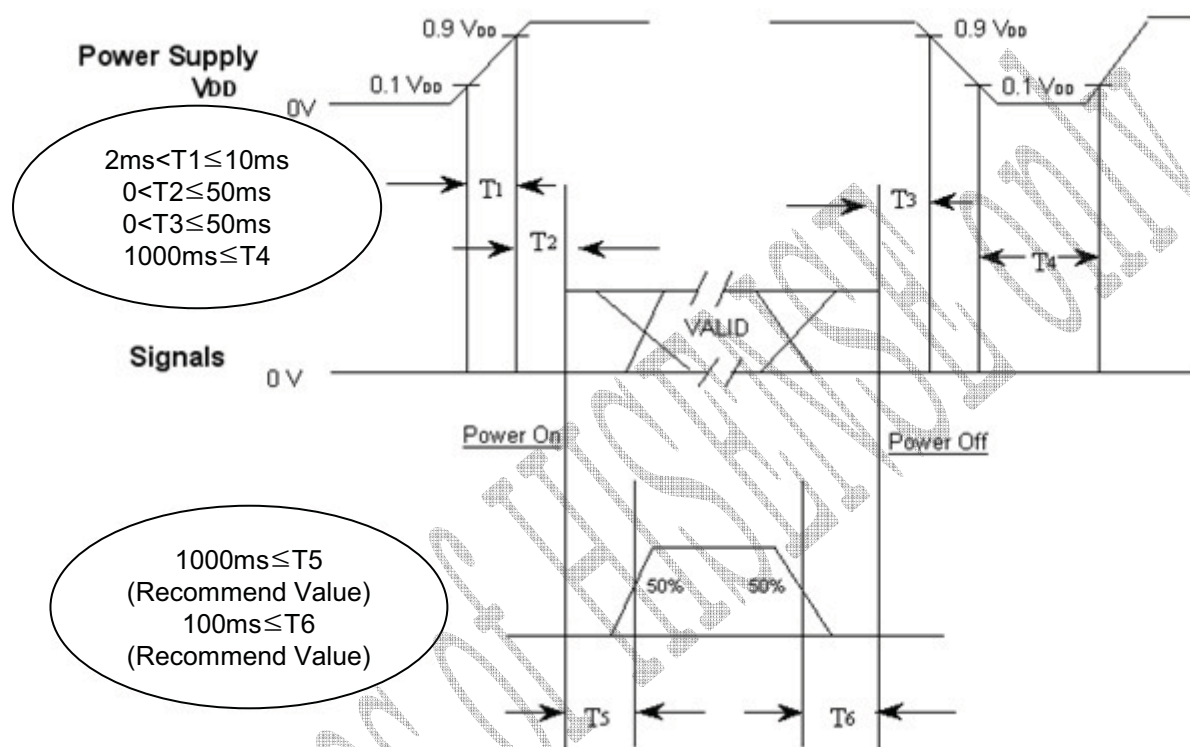| MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	18 / 29

5.2 Timing diagrams of interface signal (DE only mode)
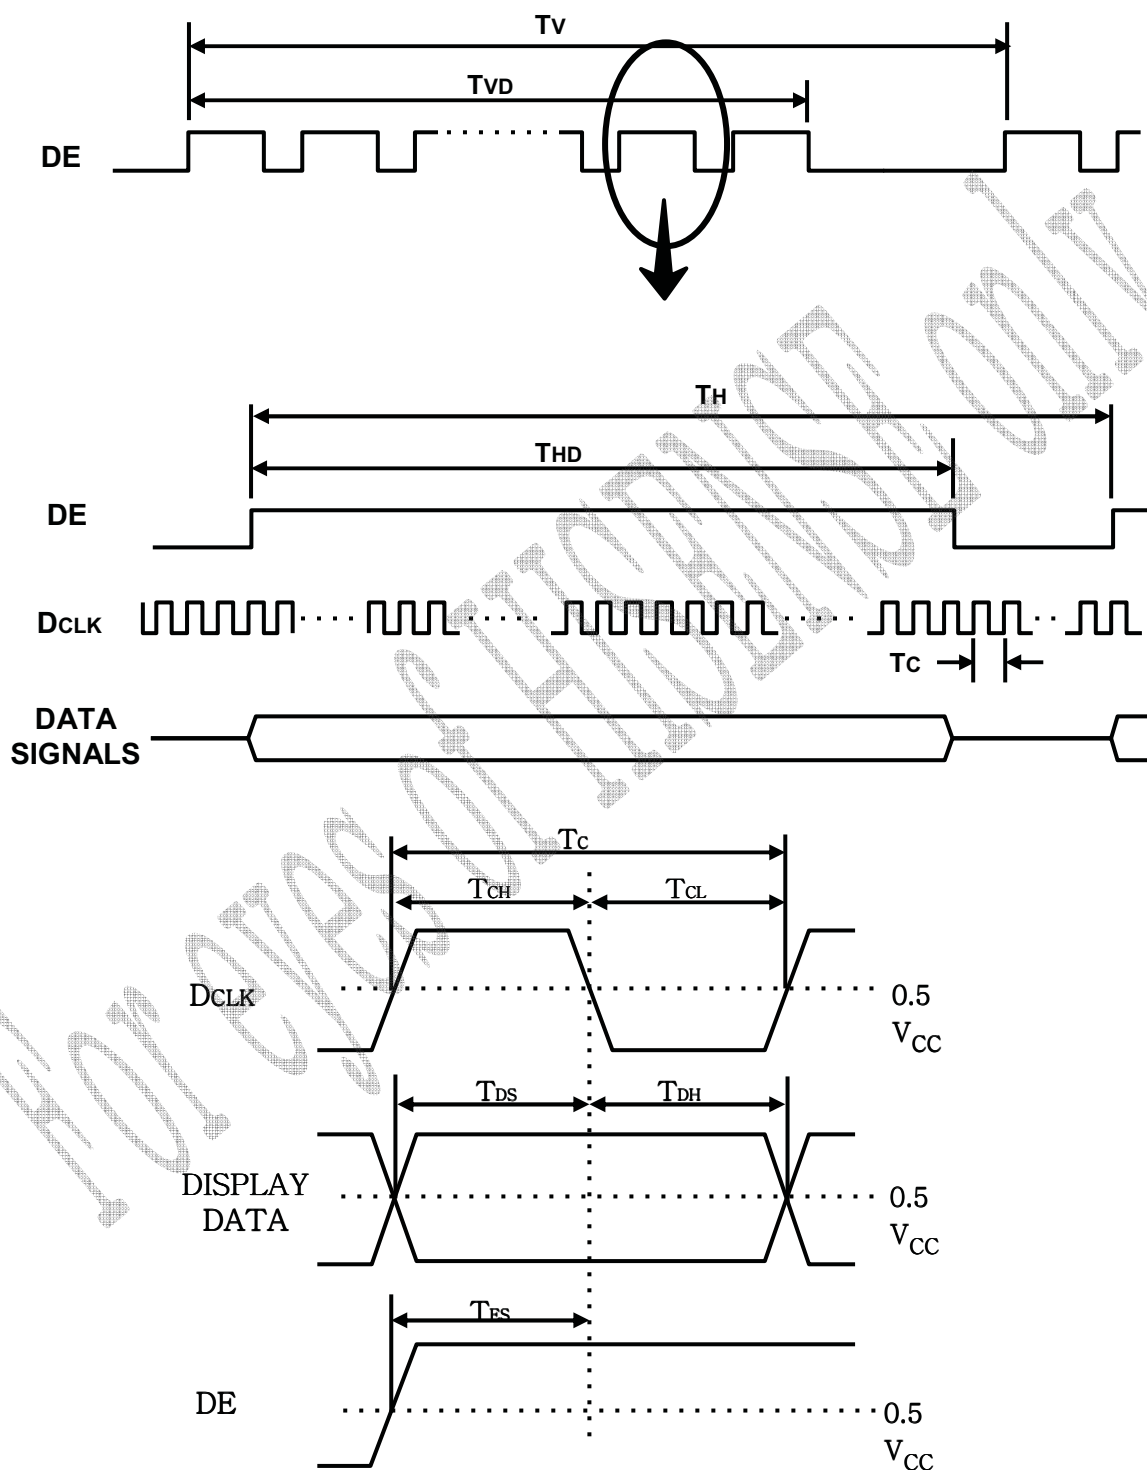
5.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

2ms<T1≤10ms
0<T2≤50ms
0<T3≤50ms
1000ms≤T4

1000ms≤T5 (Recommend Value)
100ms≤T6 (Recommend Value)

T1 : VDD rising time from 10% to 90%
T2 : The time from VDD to valid data at power ON.
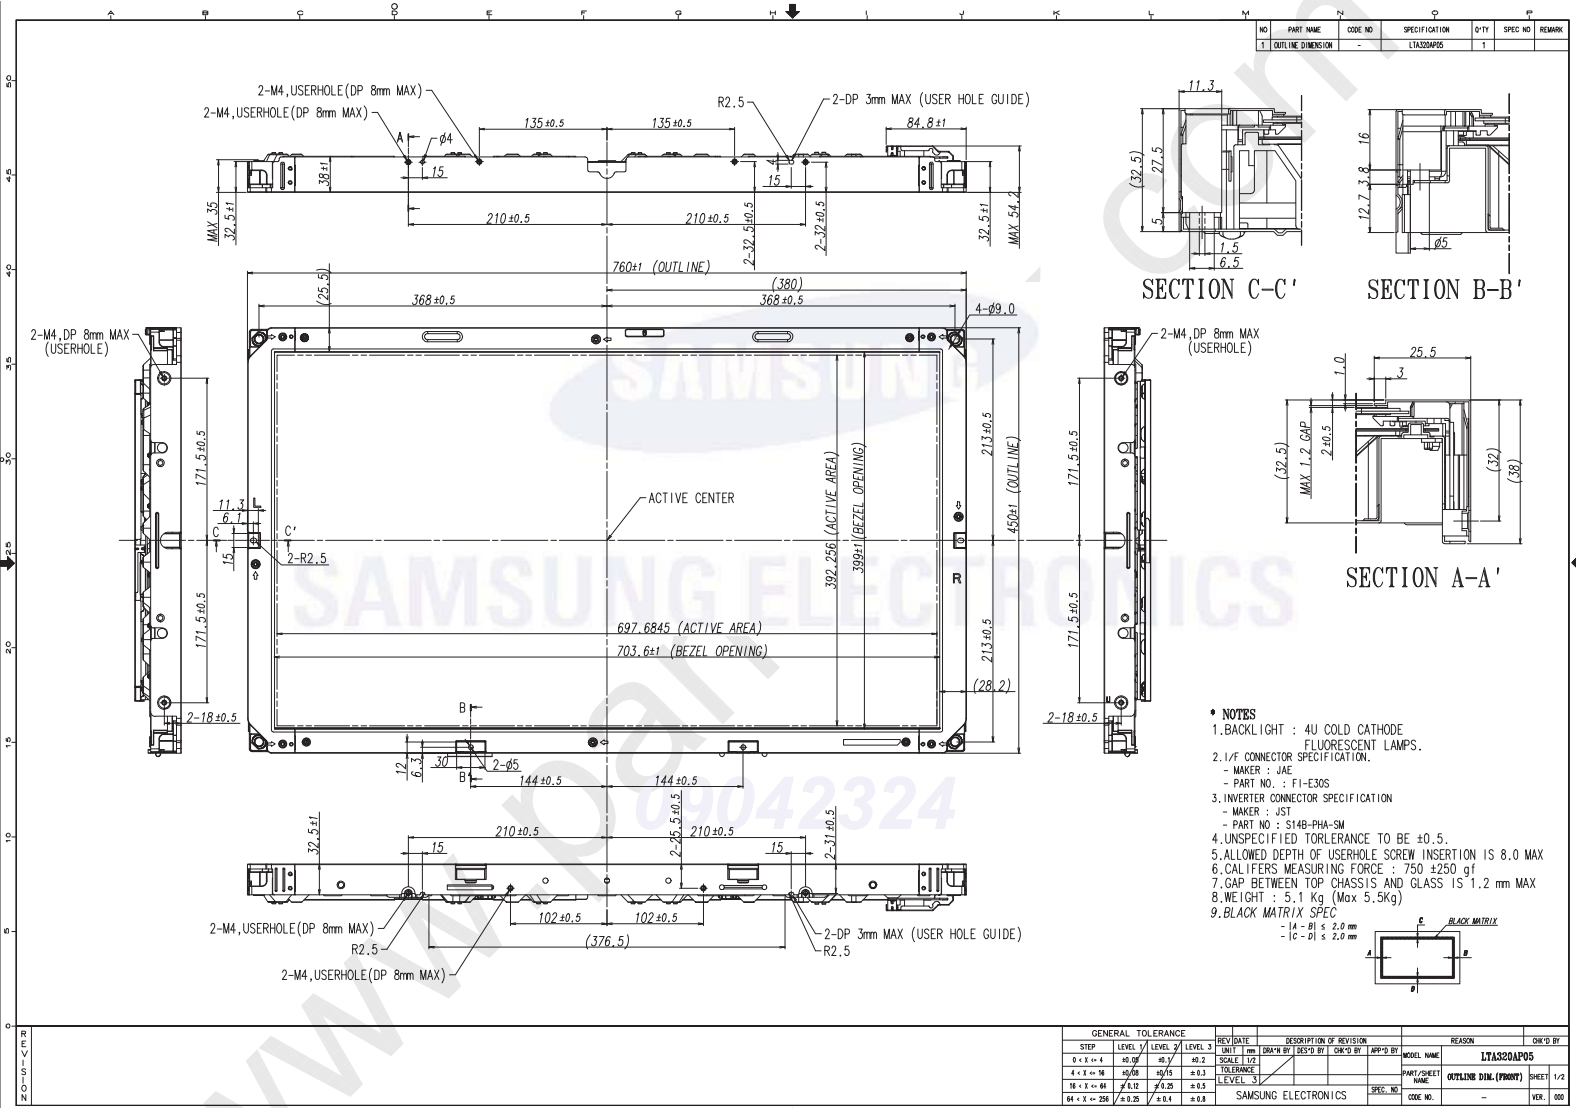T3 : The time from valid data off to VDD off at power Off.
T4 : VDD off time for Windows restart
T5 : The time from valid data to B/L enable at power ON.
T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of VDD.
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of VDD = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

| MODEL | LTA320AP05-107 | Doc. No | 06-000-G-100902 | Page | 20 / 29 |

SECTION C-C'   SECTION B-B'

SECTION A-A'

ACTIVE CENTER

SAMSUNG ELECTRONICS

NOTES
1. BACKLIGHT : 4U COLD CATHODE
   FLUORESCENT LAMPS.
2. I/F CONNECTOR SPECIFICATION.
   - MAKER : JAE
   - PART NO. : FI-E30S
3. INVERTER CONNECTOR SPECIFICATION
   - MAKER : JST
   - PART NO : S14B-PHA-SM
4. UNSPECIFIED TORLERANCE TO BE ±0.5.
5. ALLOWED DEPTH OF USERHOLE SCREW INSERTION IS 8.0 MAX
6. CALIFERS MEASURING FORCE : 750 ±250 gf
7. GAP BETWEEN TOP CHASSIS AND GLASS IS 1.2 mm MAX
8. WEIGHT : 5.1 Kg (Max 5.5Kg)
9. BLACK MATRIX SPEC
   - |A - B| ≤ 2.0 mm
   - |C - D| ≤ 2.0 mm

NO	PART NAME	CODE NO	SPECIFICATION	Q'TY	SPEC NO	REMARK
1	OUTLINE DIMENSION	-	LTA320AP05	1		

GENERAL TOLERANCE

STEP	LEVEL 1	LEVEL 2	LEVEL 3
0 < X ≤ 4	±0.05	±0.1	±0.2
4 < X ≤ 16	±0.08	±0.15	±0.3
16 < X ≤ 64	±0.12	±0.25	±0.5
64 < X ≤ 256	±0.25	±0.4	±0.8

REV	DATE	DESCRIPTION OF REVISION				REASON	CHK'D BY
UNIT	mm	DRA'N BY	DES'D BY	CHK'D BY	APP'D BY	MODEL NAME	LTA320AP05
SCALE	1/2						
TOLERANCE						PART/SHEET NAME	OUTLINE DIM.(FRONT)
LEVEL 3							SHEET 1/2
SPEC. NO		SAMSUNG ELECTRONICS				CODE NO.	-
						VER.	000

REVISION

NO	PART NAME	CODE NO	SPECIFICATION	Q'TY	SPEC NO	REMARK
	OUTLINE DIMENSION	-	LTA320AP05	1		

306.7(LAMP SUPPORT AREA, HT MAX 3.5mm)

BEAD HT=1.0mm

222.5 ±5

300.8 ±1

GENERAL TOLERANCE			
STEP	LEVEL 1	LEVEL 2	LEVEL 3
0 < X ≤ 4	±0.05	±0.1	±0.2
4 < X ≤ 16	±0.08	±0.15	±0.3
16 < X ≤ 64	±0.12	±0.25	±0.5
64 < X ≤ 256	±0.25	±0.4	±0.8

REV	DATE	DESCRIPTION OF REVISION				REASON	CHG'D BY
UNIT	mm	DRA'N BY	DES'D BY	CHK'D BY	APP'D BY		
SCALE	1/2						
TOLERANCE							

SAMSUNG ELECTRONICS

MODEL NAME	LTA320AP05		
PART/SHEET NAME	OUTLINE DIM.(REAR)	SHEET	2/2
CODE NO.	-	VER.	000

SPEC. NO

REVISION

7. PACKING

7.1 CARTON (Internal Package)
  (1) Packing Form
       Corrugated fiberboard box and corrugated cardboard as shock absorber
  (2) Packing Method
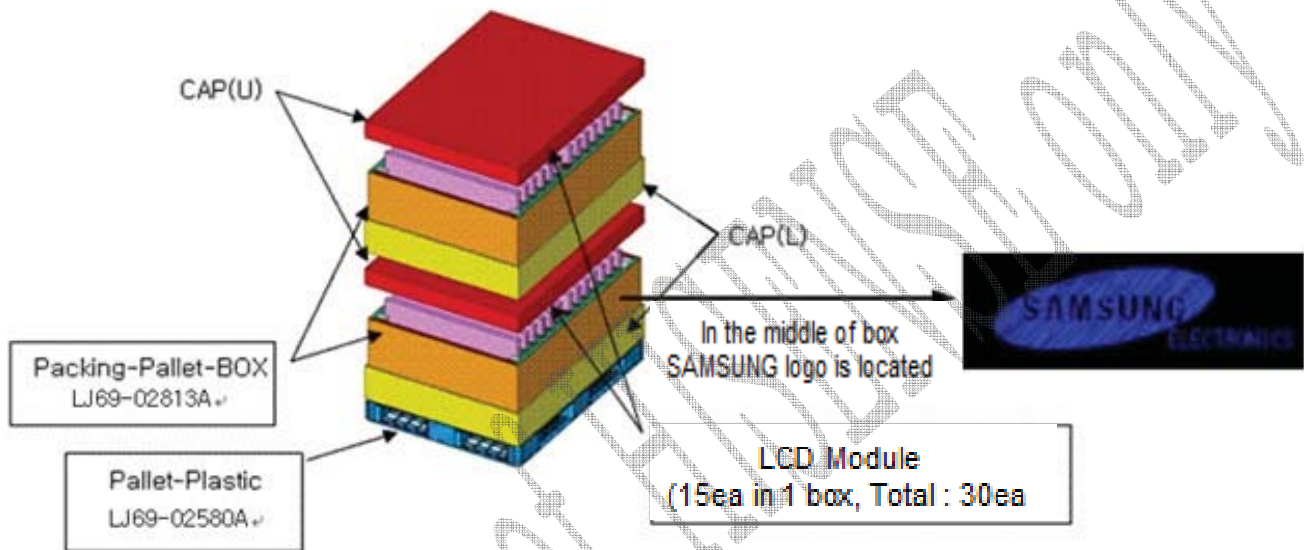
Pallet-Plastic

7.2 Packing Specification

Item	Specification	Remark
LCD Packing	30ea / (Packing-Pallet Box)	1. 6.0 Kg / LCD (30ea) 2. 15.0 Kg / Packing-pallet (2ea) 3. Box Material : Paper 4. Packing-Pallet Box Material : DW4
Pallet	2Box / Pallet	1.Pallet weight = 6kg 2.210kg/Pallet , Total : 216kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1150mm(H) x 850mm(V) x 1105 mm (height)
Total Pallet Weight	216 kg	Pallet(6kg) + Module(180 kg) + Paper box (15 kg*2 ea=30 kg)

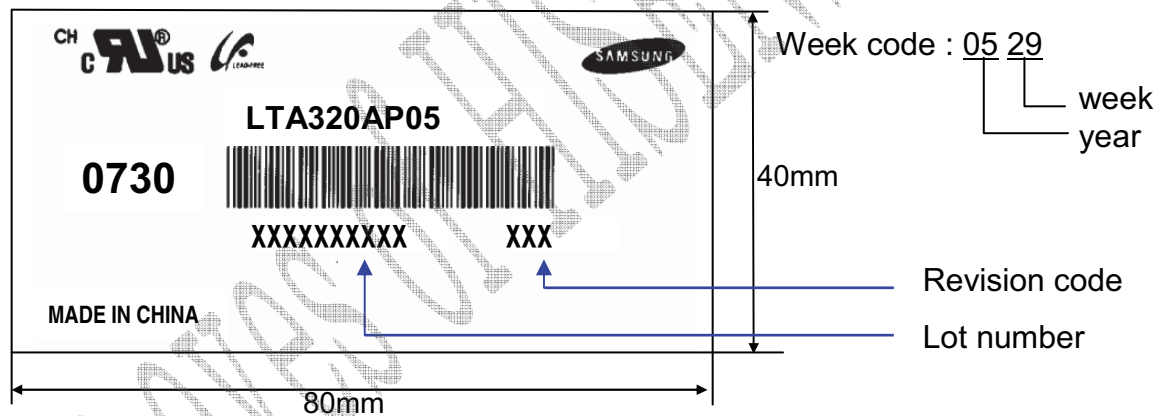| MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	23 / 29

SAMSUNG SECRET

8. MARKING & OTHERS

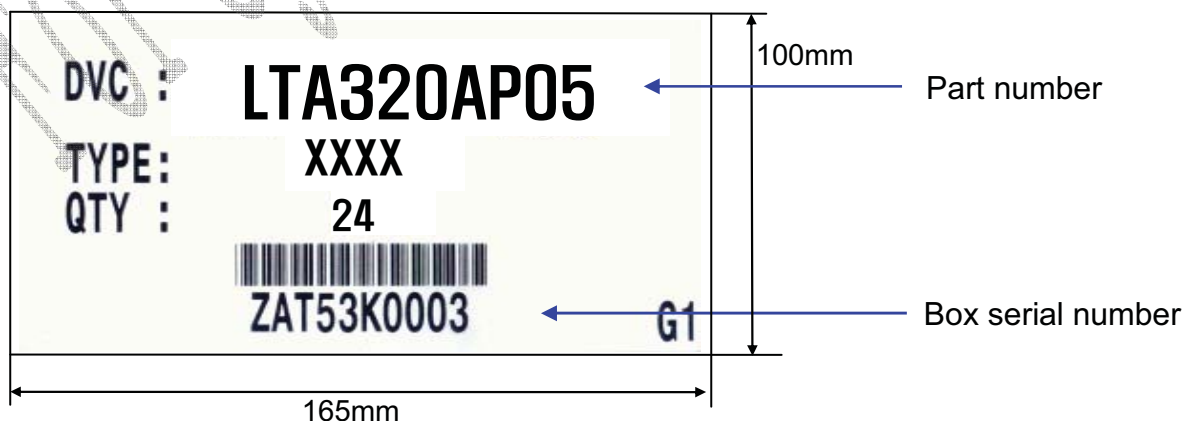A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1) Parts number : LTA320AP05
(2) Revision: Three letters
(3) Lot number : X X X X XXX XX X

- Cell Position No. (In the Glass)
- Glass No. (In the one Lot)
- Lot No. (Glass)
- Month
- Year (Note1)
- Product code
- Line

(4) Nameplate Indication

```
CH  cRUus  LEAD-FREE                SAMSUNG
         LTA320AP05
0730    ||||||||||||||||||||
        XXXXXXXXXX    XXX
MADE IN CHINA
```

Week code : 05 29
- week
- year

40mm

80mm

Revision code

Lot number

(5) Packing box attach

```
DVC :  LTA320AP05
TYPE:     XXXX
QTY :      24
       ||||||||||||||||
       ZAT53K0003      G1
```

100mm — Part number

Box serial number

165mm
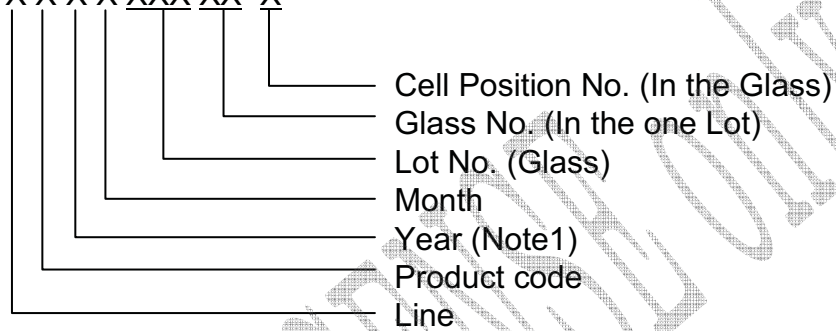
(6) Others

  1. After service part

    Lamps cannot be replaced because of the narrow bezel structure.

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	24 / 29

9. General Precautions

SAMSUNG SECRET

9.1 Handling

(a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.

(b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.

(c) Refrain from strong mechanical shock and / or any force to the Module. In addition to damage, this may cause improper operation or damage to the Module and CCFL back light.

(d) Note that polarizers are very fragile and could be damage easily. Do not press or scratch the surface harder than a HB pencil lead.

(e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.

(f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.

(g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.

(i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or Semiconductor would be damaged.

(j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(k) Do not disassemble the Module.

(l) Do not disassemble shield case of inverter & LVDS board.

(m) Do not connect N.C pins. (Samsung internal use only)

(n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handle a module

(o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	25 / 29

SAMSUNG SECRET

9.2 Storage

(a) Do not leave the Module in high temperature, and high humidity for a long time.
   It is highly recommended to store the Module with temperature from 0 to 35℃
   and relative humidity of less than 70%.

(b) Do not store the TFT-LCD Module in direct sunlight.

(c) The Module should be stored in a dark place. It is prohibited to apply sunlight or
   fluorescent light in storing.

9.3 Operation

(a) Do not connect or disconnect the Module in the "Power On" condition.

(b) Power supply should always be turned on/off by the "Power on/off sequence"

(c) Module has high frequency circuits. Sufficient suppression to the electromagnetic
   interference should be done by system manufacturers. Grounding and shielding methods
   may be important to minimize the interference.

(d) The cable between the back light connector and its inverter power supply should
   be connected directly with a minimized length. A longer cable between
   the back light and the inverter may cause lower luminance of lamp(CCFL) and
   may require higher startup voltage(Vs).

9.4 Operation Condition Guide

(a) The LCD product should be operated under normal conditions.
   Normal condition is defined as below;
   - Temperature : 20± 15℃
   - Humidity : 55± 20%
   - Display pattern : continually changing pattern (Not stationary)

(b) If the product will be used in extreme conditions such as high temperature,
   humidity, display patterns or operation time etc.., It is strongly recommended
   to contact SEC for Application engineering advice. Otherwise, its reliability and
   function may not be guaranteed. Extreme conditions are commonly found at
   Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTA320AP05-107	Doc. No	06-000-G-100902	Page	26 / 29

9.5 Others   *SAMSUNG SECRET*

(a) Ultra-violet ray filter is necessary for outdoor operation.

(b) Avoid condensation of water. It may result in improper operation or disconnection
    of electrode.

(c) Do not exceed the absolute maximum rating value. (supply voltage variation,
    input voltage variation, variation in part contents and environmental temperature,
    and so on)
    Otherwise the Module may be damaged.

(d) If the Module keeps displaying the same pattern for a long period of time,
    the image may be "sticked" to the screen.
    To avoid image sticking, it is recommended to use a screen saver.

(e) This Module has its circuitry PCB's on the rear side and should be handled
    carefully in order not to be stressed.

(f) Please contact SEC in advance when you display the same pattern for a long time.

| MODEL | LTA320AP05-107 | Doc. No | 06-000-G-100902 | Page | 27 / 29 |